


Our Pride ...

KCP40ZX5170

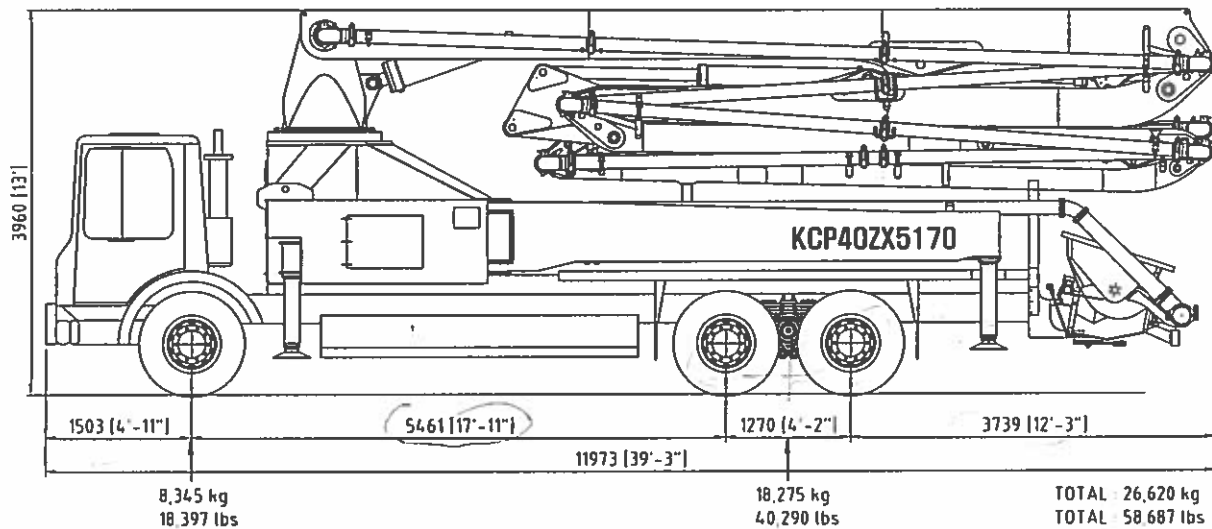


☐ Boom specifications

Vertical reach	39.6 M
Horizontal reach	35.6 M
Reach from front of truck	32.5 M
Unfolding height	7.91 M
Section articulation	92°/186°/240°/180°/245°
Rotation	370°
Delivery line	125 mm
Proportional boom	Yes
End hose length	3.5M
Outrigger spread-front	6.18 M
Outrigger spread-rear	8.1 M
Max.outrigger weight	22,500kg

- Truck specifications : MACK
- Maximum theoretical values listed.
- Photos and drawings are for illustrative purpose only
- Right to make technical amendments reserved

☐ Working diagram

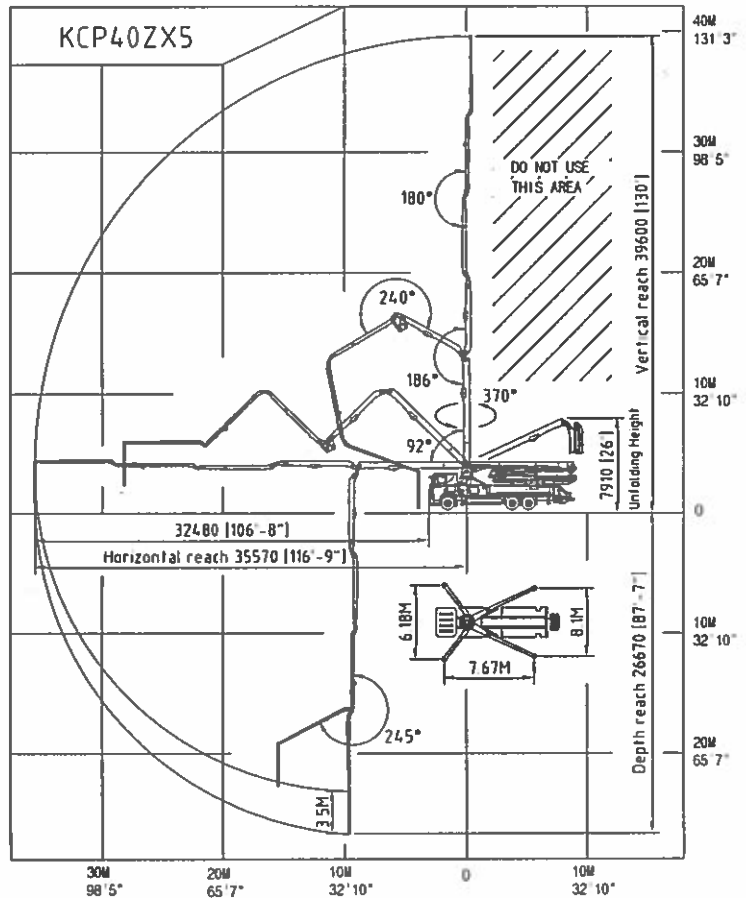

☐ Pump specifications

Maximum output	170 m ³ /h
Concrete cylinder	Ø230×2100
Stroke per minute	32
Concrete pressure	72 bar
Hopper capacity	0.6 m ³
S-tube	Ø200×Ø180
Hydraulic pump	KCP - K3V180DT
Cycling system	Hydraulic with manual overrides
Max. aggregate size	40 mm