



Powerful Synergies



**HIGH POWER  
MODEL**

# COPMA 240

Performance & Power

**240 HAS THE HIGHEST LIFTING RANGE AND TOP POWER-WEIGHT RATIO COMBINING ADVANCED TECHNOLOGY FEATURES FOR MORE PERFORMANCE.**

- **HIGH POWER** model, load category - 24 Ton/Mt
- Designed for every kind of job
- Strong linkage system on each arm to get maximum performance
- Precise and fast work execution
- High safety standards





**THE MOST  
POWERFUL  
CRANE FOR  
THE TOUGHEST  
MARKETS**



# COPMA 240

More Safety & Security

**DESIGNED WITH THE HIGHEST HYDRAULIC SYSTEMS AND THE TOUGHEST STRUCTURAL STEEL TO PERFORM THE MAXIMUM LIFTING CAPACITY.**

- Performing and reliable electronic devices
- Column with high mechanical characteristics
- High Degree of User Friendliness
- Ready to work in a few movements
- Excellent weight/performance ratio





**DESIGNED  
FOR FLEXIBLE  
SERVICES**

# COPMA 240

## Technical Features


**CUTTING EDGE FEATURES  
FOR MAXIMUM LIFTING  
POWER, STABILITY AND  
OPERATIONAL SAFETY IN EVERY  
WORKING CONDITION.**

### Standard features

- easy use



- control

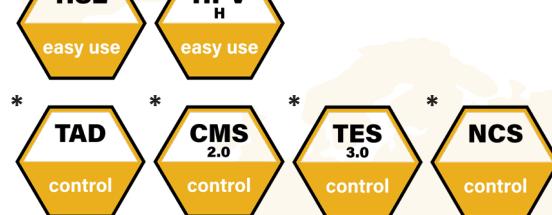

- structure



### optional features

- easy use



- control



\*E.C. market specific equipment





## High Speed Extension

Hydraulic system for reducing load losses and bottlenecks for the correct output sequence of the extensions by increasing the speed of 30%-60% thanks to the regenerative valve. Greater continuous performance thanks to lower fluid temperature.



## Transport Alert Device

Sensors on the basement controls the correct closing of the beams and a column switch sensor indicates if the crane is in a folded position, no more than 4 mt in height. The operator is warned with light and sound signals in the truck cabin.




## Crane Monitoring System 2.0

Crane stability control system TES2-TES3 with safety and overload controls and HPVE lifting speed management. Active control on 4-8 working areas according to the model and vehicle stability requirements.



## Truck Electronic Stability 3.0

Active stability control for performance optimization according to the type of stabilization (3) to guarantee maximum safety in all working conditions. Mandatory in the CE market, it helps a better vehicle-crane configuration.

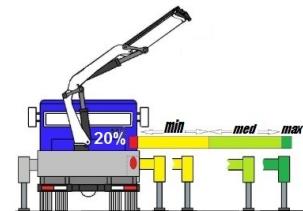

## Negative Control System

Slope sensors mounted on the articulated booms of the crane, combined with the electronic control, control the maximum vertical angle of the arms and the JIB preventing incorrect or dangerous movements by the operator.



## Constant Control Link


The cranes equipped with connecting rods on the articulations, with a constant lifting moment over the entire working arc, allow to 100% optimize the crane's capacity in positions close to the maximum vertical.

With Link  
Without Link



## Negative Boom System

The linkage on the articulation of the secondary boom permits the introduction of loads within restricted spaces. It enables the recovery of the deflection of the extension boom group due to the weight and the load raised on the extensions.

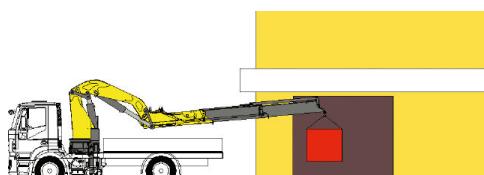

## Rotation Rack Pinion

The rotation system with rack and pinion is the best optimal solution for the most performative lifting capacity, it reduce the weights and crane dimension for the most compact configuration.





## Hydraulic Lifting Stabilizers 2.0

The cylinder of the stabilizer is lifted with an auxiliary jack, allowing the vertical movement within the bushes or rotating around a pin. It saves operative time in increasing the security of the setup.




## Radio Remote Control 3.0

Radio control with directly flanged actuation electronics with proportional distribution.  
The remote control allows operating the crane while constantly monitoring the areas of operation.




## Electronic Radio Display

A display on the remote control allows the operator to maintain the total control of all the crane functions in real time by managing the work mode, the stability control, and oversee any maintenance and diagnostic messages.

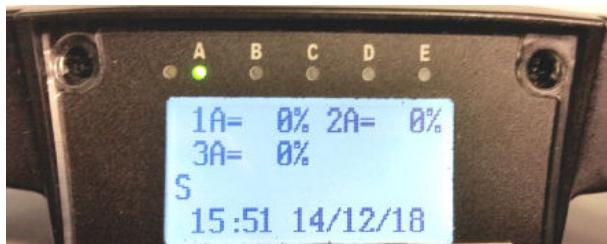


## High Power Velocity Hydraulic

Fully automatic hydraulic system for adjusting the crane lifting speed according to the maximum working pressure. With this system, the load capacity of the machine is optimized by reducing the dynamic structural effects.

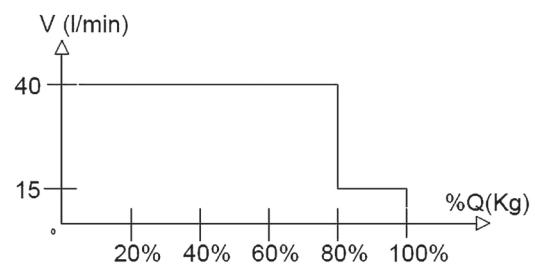

## Winch Linear Control

The winch linear electronic control allows pulling the rope according to the working angle of the crane and the JIB .  
It optimizes the load control and makes every movement easier and safer.

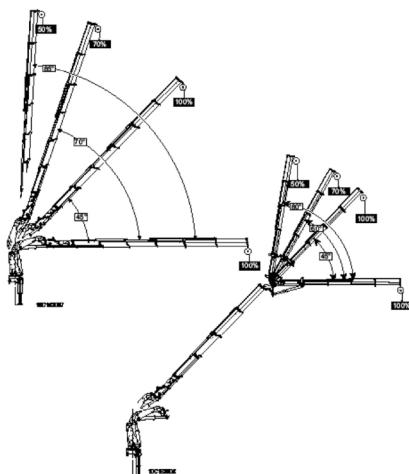


# 240 HIGH POWER


## Load Charts

2


### 2 extensions

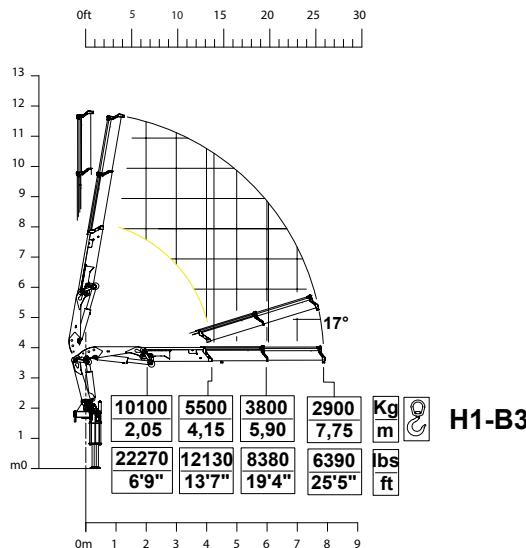


### 3 extensions

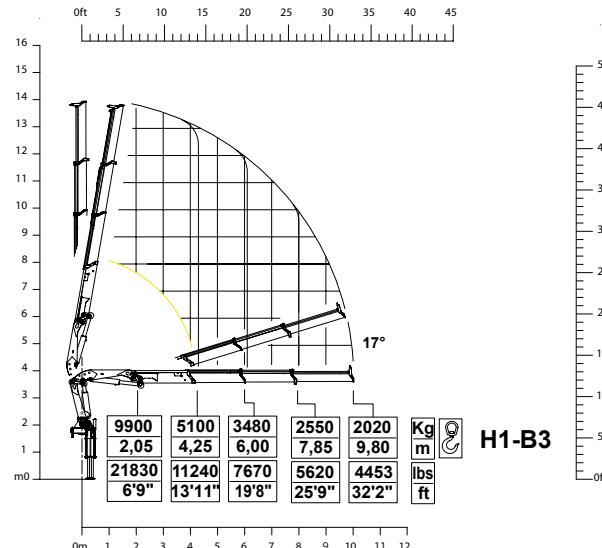

### 4 extensions

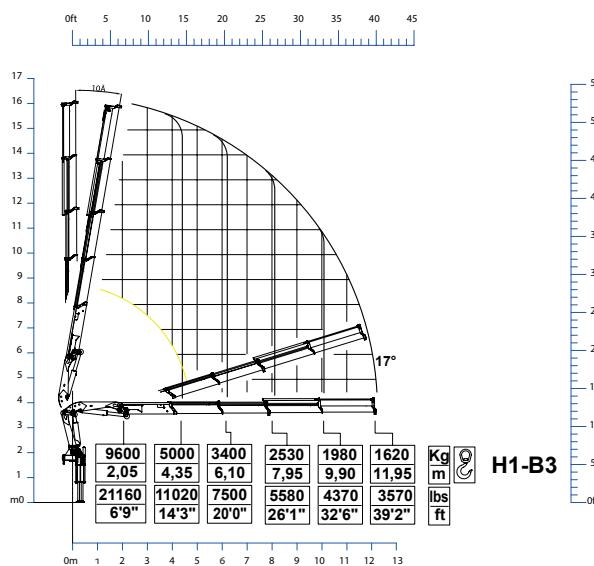


### 5 extensions

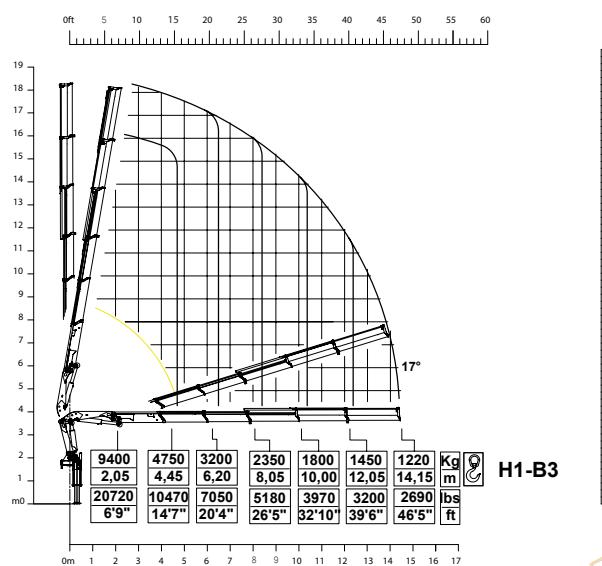


\*CARICO AL GANCI FISSO A RICHIESTA  
\*CAPACITY AT FIXED HOOK ON DEMAND




### 6 extensions

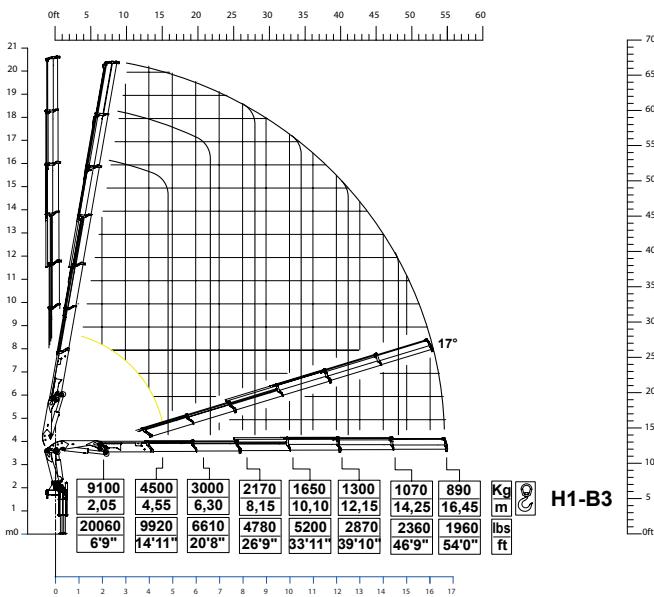


### 7 extensions

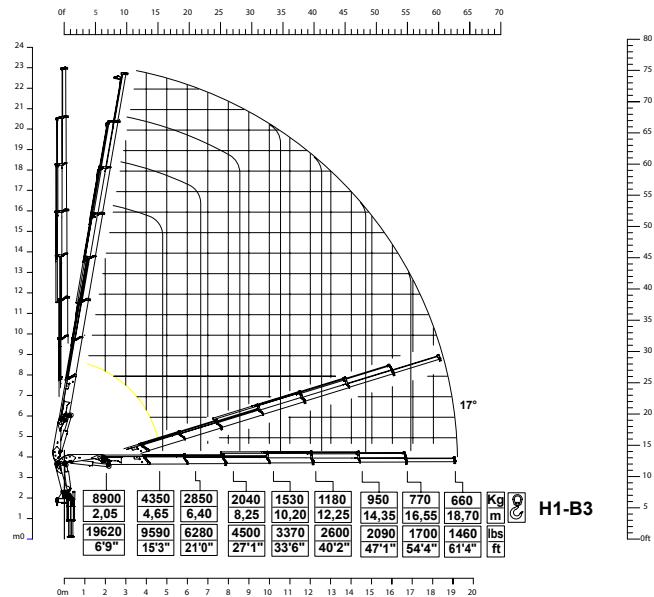


### 240.4 + J2

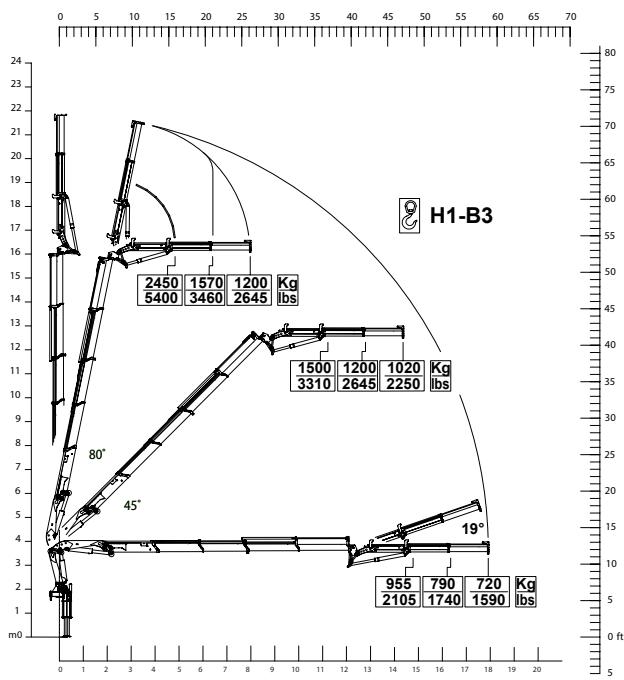


## 240.4 + J3

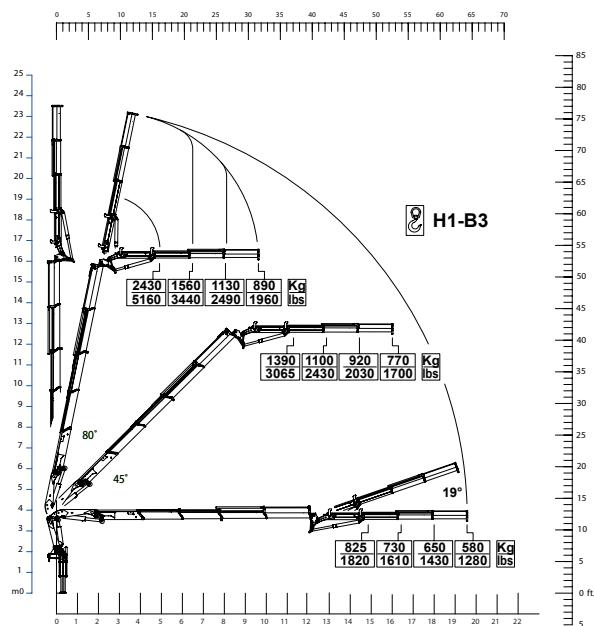


## 240.4 + J4

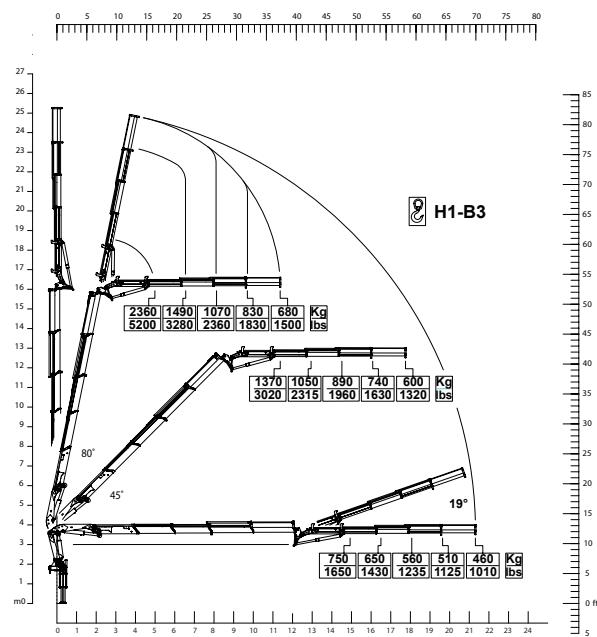


## 240.5 + J3

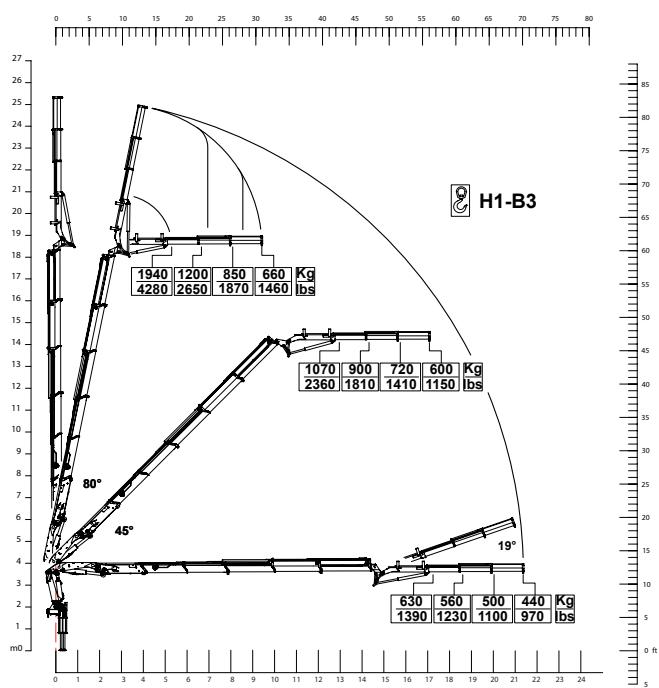

## 240.5 + J4

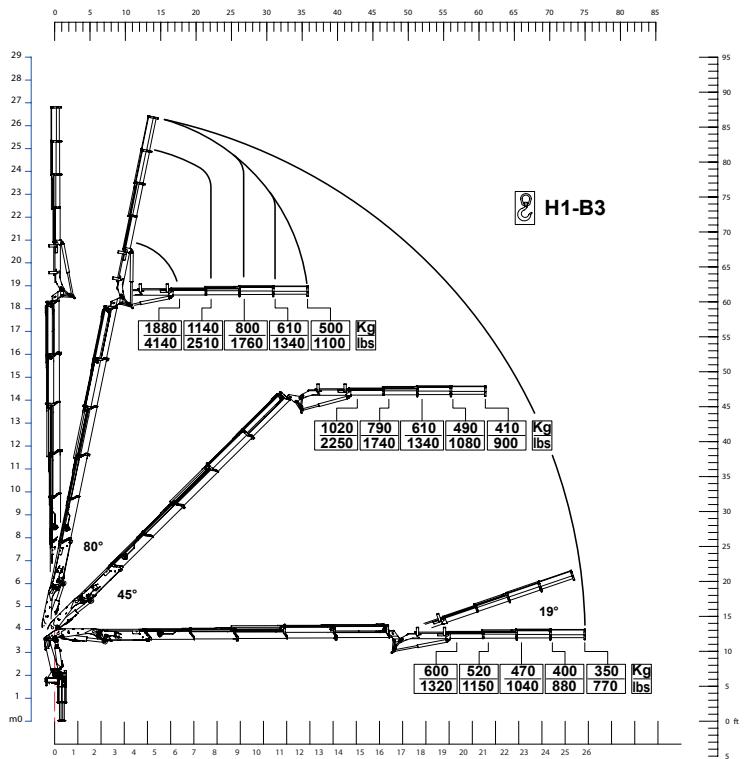


## 240.6 + J3

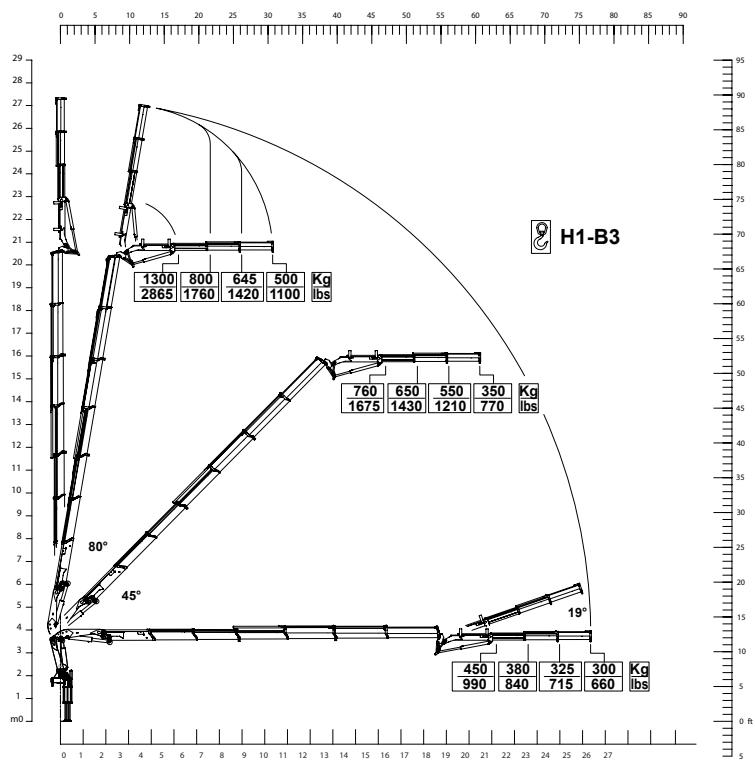


# 240 HIGH POWER




## Crane Dimensions

### back cabin left

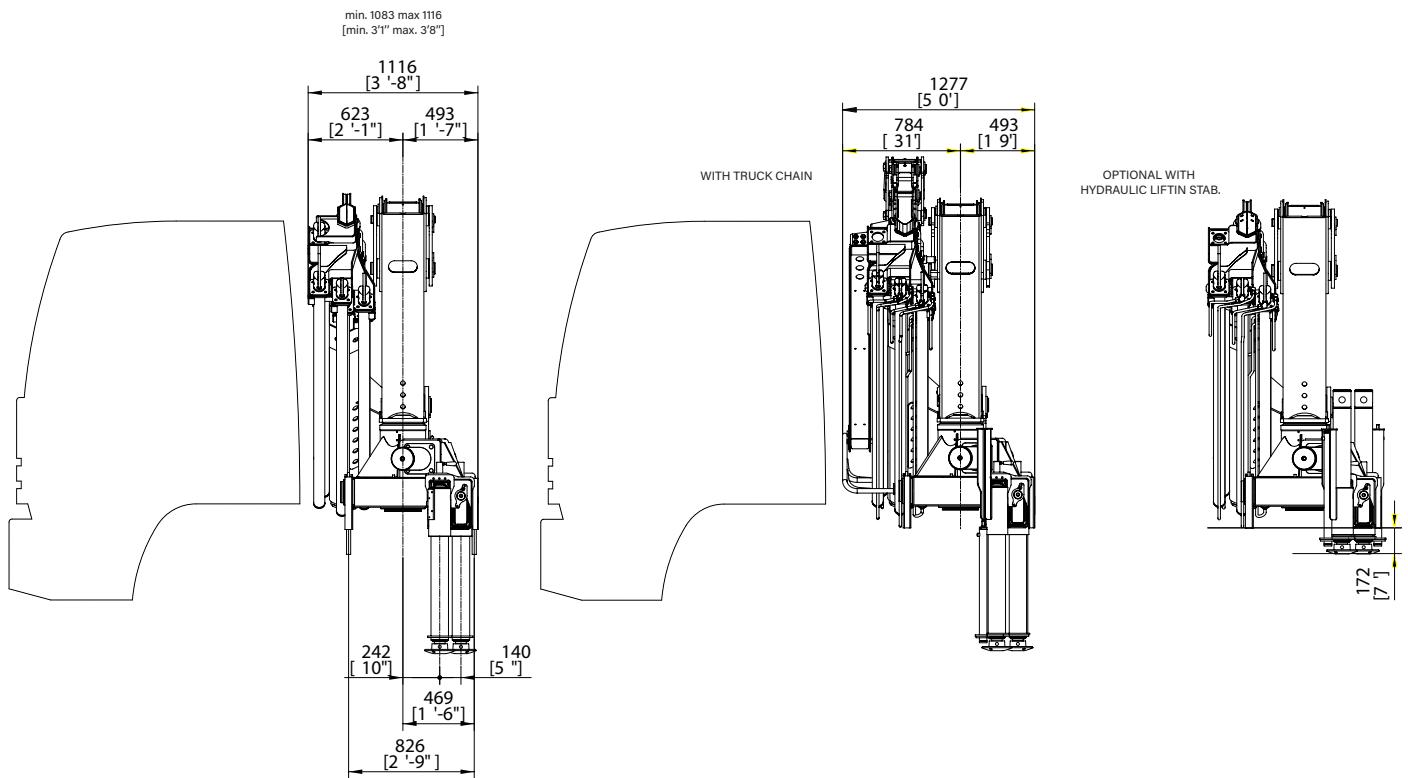

### rear truck

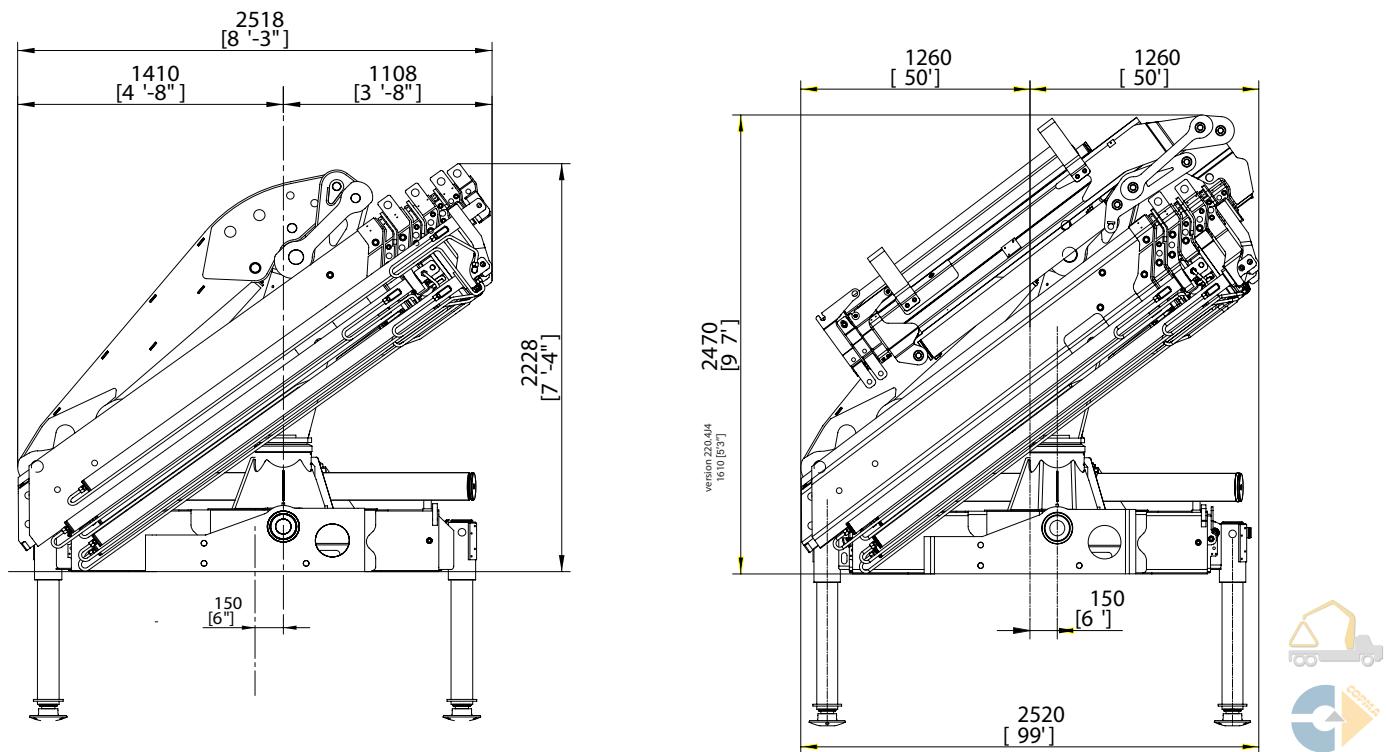

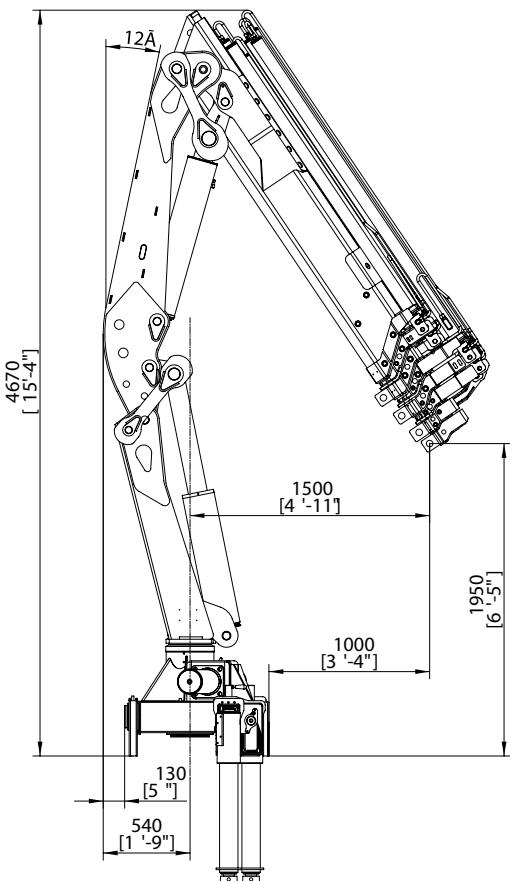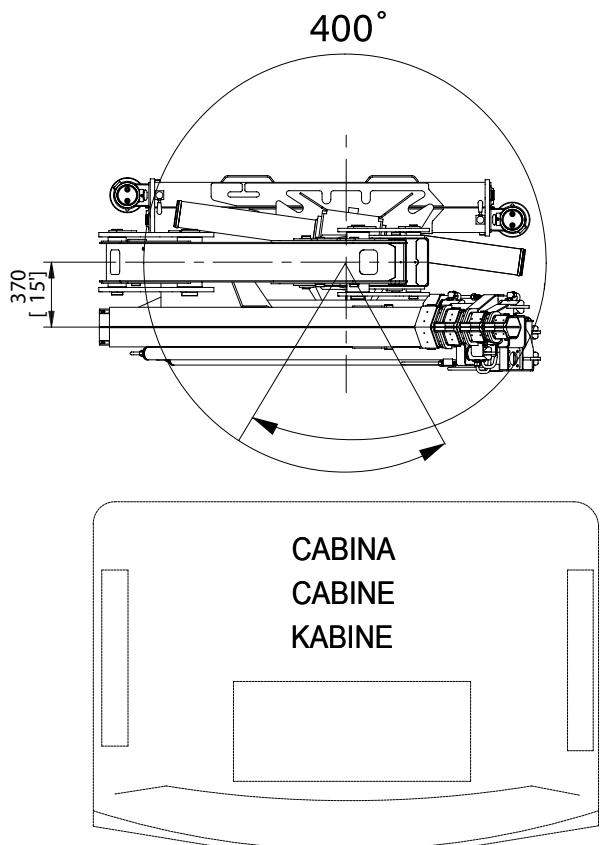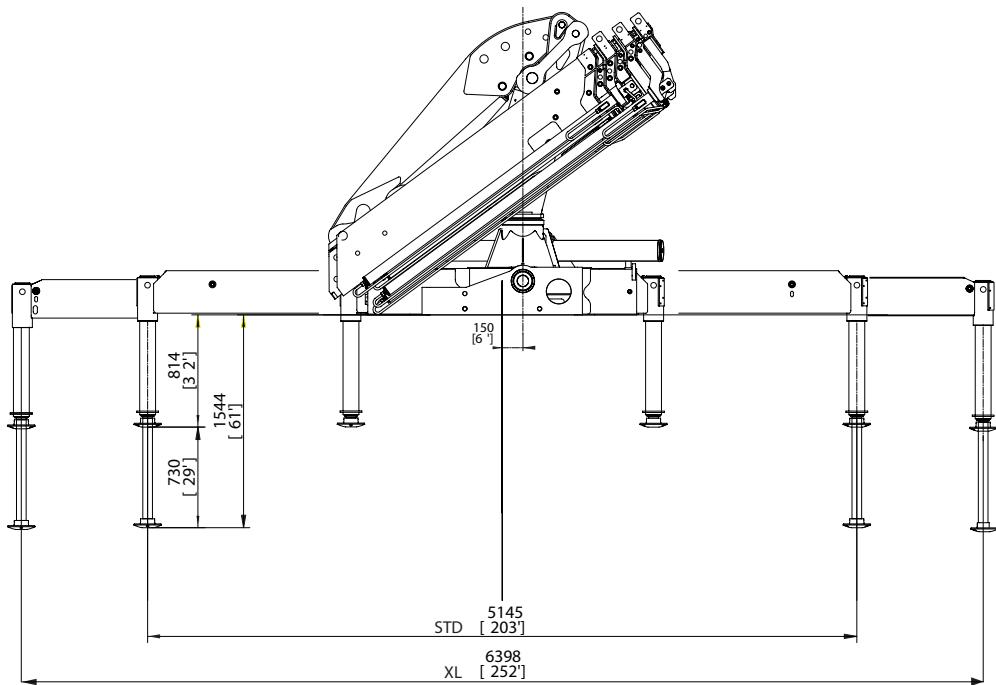**top cabin****operational****extended outriggers**

\* Note:

Technical features are not binding.  
The company reserves itself the right to any modification without notice



# 240 HIGH POWER

## Technical Data

### summarized data

|         | kN.m | bar | l/min | kg   | °   | mm   | mm   | mm   | mm        |
|---------|------|-----|-------|------|-----|------|------|------|-----------|
| 240.2   | 224  | 280 | 40    | 2870 | 400 | 2453 | 1083 | 2194 | 5200/6400 |
| 240.3   | 219  | 280 | 40    | 3024 | 400 | 2453 | 1083 | 2194 | 5200/6400 |
| 240.4   | 213  | 280 | 40    | 3170 | 400 | 2453 | 1127 | 2194 | 5200/6400 |
| 240.4J2 | 213  | 280 | 40    | 3530 | 400 | 2480 | 1267 | 2610 | 5200/6400 |
| 240.4J3 | 213  | 280 | 40    | 3606 | 400 | 2480 | 1267 | 2610 | 5200/6400 |
| 240.4J4 | 213  | 280 | 40    | 3745 | 400 | 2480 | 1267 | 2610 | 5200/6400 |
| 240.5   | 207  | 280 | 40    | 3310 | 400 | 2518 | 1127 | 2194 | 5200/6400 |
| 240.5J3 | 207  | 280 | 40    | 3748 | 400 | 2518 | 1267 | 2470 | 5200/6400 |
| 240.5J4 | 207  | 280 | 40    | 3790 | 400 | 2518 | 1267 | 2470 | 5200/6400 |
| 240.6   | 207  | 280 | 40    | 3430 | 400 | 2518 | 1127 | 2194 | 5200/6400 |
| 240.6J3 | 201  | 280 | 40    | 3866 | 400 | 2520 | 1127 | 2470 | 5200/6400 |
| 240.7   | 198  | 280 | 40    | 3532 | 400 | 2518 | 1127 | 2194 | 5145/6398 |

|         | lbs.ft | psi  | gal/min | lbs  | °   | ft/inc | ft/inc | ft/inc | ft/inc          |
|---------|--------|------|---------|------|-----|--------|--------|--------|-----------------|
| 240.2   | 161956 | 4060 | 10,5    | 6330 | 400 | 8'1"   | 3'7"   | 8'6"   | 16'11" / 21'10" |
| 240.3   | 158320 | 4060 | 10,5    | 6720 | 400 | 8'1"   | 3'7"   | 8'6"   | 16'11" / 21'10" |
| 240.4   | 154329 | 4060 | 10,5    | 6990 | 400 | 8'1"   | 3'8"   | 8'6"   | 16'11" / 21'10" |
| 240.4J2 | 154329 | 4060 | 10,5    | 7780 | 400 | 8'2"   | 4'2"   | 10'3"  | 16'11" / 21'10" |
| 240.4J3 | 154329 | 4060 | 10,5    | 7950 | 400 | 8'2"   | 4'2"   | 10'3"  | 16'11" / 21'10" |
| 240.4J4 | 154329 | 4060 | 10,5    | 8300 | 400 | 8'2"   | 4'2"   | 10'3"  | 16'11" / 21'10" |
| 240.5   | 149983 | 4060 | 10,5    | 7300 | 400 | 8'3"   | 3'8"   | 8'6"   | 16'11" / 21'10" |
| 240.5J2 | 149983 | 4060 | 10,5    | 8260 | 400 | 8'3"   | 4'2"   | 9'7"   | 16'11" / 21'0"  |
| 240.5J3 | 149983 | 4060 | 10,5    | 8360 | 400 | 8'3"   | 4'2"   | 9'7"   | 16'11" / 21'0"  |
| 240.6   | 145282 | 4060 | 10,5    | 7560 | 400 | 8'3"   | 3'8"   | 8'6"   | 16'11" / 21'10" |
| 240.6J3 | 145282 | 4060 | 10,5    | 8520 | 400 | 8'3"   | 4'2"   | 9'7"   | 16'11" / 21'0"  |
| 240.7   | 143526 | 4060 | 10,5    | 7790 | 400 | 8'3"   | 3'8"   | 8'6"   | 16'11" / 21'10" |

### technical data

|  |               |                  |
|--|---------------|------------------|
| <b>Max. lifting moment</b>               | 224 kNm       | 161956 ft.lbs    |
| <b>Max. hydraulic outreach</b>           | 18.70 m       | 61'4"            |
| <b>Slewing angle</b>                     | 400°          | 400°             |
| <b>Slewing torque</b>                    | 3270 daNm     | 23652 ft.lbs     |
| <b>Stabilizer spread</b>                 | 5.14/6.4 mt   | 116'11" / 20'12" |
| <b>Fitting space required (min./max)</b> | 1,08 m/1.27 m | 3'1"/5'0"        |
| <b>Width folded</b>                      | 2,52 m        | 8'3"             |
| <b>Max. operating pressure</b>           | 280 bar       | 4060 psi         |
| <b>Recommended pump capacity</b>         | 40 l/min      | 10,5 US gal./min |
| <b>Dead weight (vers .2)</b>             | 2870 kg       | 6330 lbs         |



\* Note: technical features are not binding, the company reserves itself the right to any modification without notice

# COPMA 240



knuckle  
boom  
cranes



Powerful Synergies



## CPS GROUP S.P.A.

281 Via Emilia , Castel Bolognese (RA) , 48014  
Italy

T +39 0546 653 711

[sales.cpsgroup@cps-group.com](mailto:sales.cpsgroup@cps-group.com)  
[service.cpsgroup@cps-group.com](mailto:service.cpsgroup@cps-group.com)

[cps-group.com](http://cps-group.com)

COPMA MODEL 240 HIGH POWER 6-2019 all rights reserved CPS GROUP



Technical features, design and specifications are not binding. CPS GROUP S.P.A. reserves itself the right to any modifications without prior notice.  
COPMA, PESCI, PESCI MARINE and CPS are registered trademarks of CPS GROUP S.P.A. in Italy and other countries.