



Powerful Synergies



COPMA
650

**TOP RANGE
MODEL**

COPMA 650

Performance & Power

**650 HAS COMPACT DIMENSIONS
AND OPTIMIZED WEIGHTS WITH A
CUSTOMIZED DESIGN FOR MORE
POWER AND RELIABILITY AT
EVERY OPERATOR NEED.**

- **TOP RANGE - HEAVY RANGE model, load category - 60 Ton/Mt**
- High tensile strength steel
- Efficient safety system
- Reliability, speed and precision
- Extra long working life cycle
- Easier maintenance operations





**THE MOST
POWERFUL
CRANE FOR
THE TOUGHEST
MARKETS**



COPMA 650

More Safety & Security

**DESIGNED WITH THE HIGHEST
HYDRAULIC SYSTEMS AND THE
TOUGHEST STRUCTURAL STEEL
TO PERFORM THE MAXIMUM
LIFTING CAPACITY.**

- Superior Hydraulic Technology
- Dynamic Electronic Controls
- High Degree of User Friendliness
- Efficiency and Reliability thanks to superior structural features
- More Efficiency with advanced electronic controls





**DESIGNED
FOR FLEXIBLE
SERVICES**



COPMA 650

Technical Features

**CUTTING EDGE FEATURES
FOR MAXIMUM LIFTING
POWER, STABILITY AND
OPERATIONAL SAFETY IN EVERY
WORKING CONDITION.**

Standard features

- easy use



- control



- structure



optional features

- control



*E.C. market specific equipment






High Speed Extension

Hydraulic system for reducing load losses and bottlenecks for the correct output sequence of the extensions by increasing the speed of 30%-60% thanks to the regenerative valve. Greater continuous performance thanks to lower fluid temperature.



Electronic Radio Display

A display on the remote control allows the operator to maintain the total control of all the crane functions in real time by managing the work mode, the stability control, and oversee any maintenance and diagnostic messages.

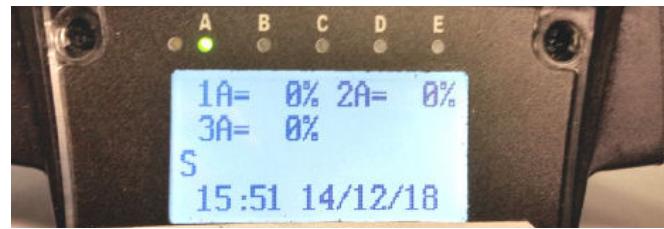

Transport Alert Device

Sensors on the basement guarantee the correct closing of the beams and a column switch sensor indicates if the crane is in a folded position, no more than 4 Mt in height. The operator is warned with light and sound signals in the truck cabin.




Hydraulic Lifting Stabilizers 2.0

The stabilizer cylinder is lifted thanks to an auxiliary jack, allowing the vertical movement inside a bush or a rotation around a pin. This easy use system saves time and allows an efficient stabilizer set up.



Negative Boom System

The linkage on the articulation of the secondary boom permits the introduction of loads within restricted spaces. It enables the recovery of the deflection of the extension boom group due to the weight and the load raised on the extensions.

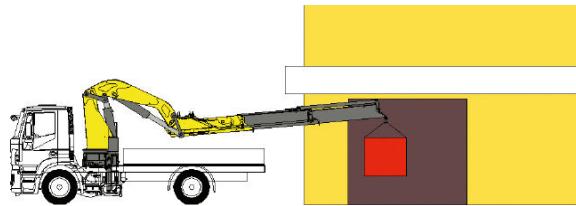

Radio Remote Control 3.0

Radio control with directly flanged actuation electronics with proportional distribution. The remote control allows operating the crane while constantly monitoring the areas of operation.





Crane Monitoring System 2.0

Crane stability control system TES2-TES3 with safety and overload controls and HPVE lifting speed management. Active control on 4-8 working areas according to the model and vehicle stability requirements.



Truck Electronic Stability 3.0


Active stability control for performance optimization according to the type of stabilization to guarantee maximum safety in all working conditions. Mandatory in the CE market, it helps a better vehicle-crane configuration.

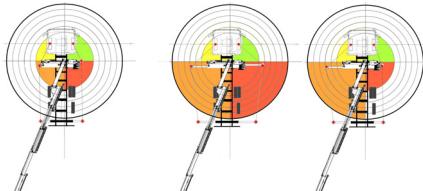




Negative Control System

Slope sensors mounted on the articulated booms of the crane, combined with the electronic control, manage the maximum vertical angle of the arms and the JIB preventing incorrect or dangerous movements by the operator.




Constant Control Link

The cranes equipped with connecting rods on the articulations, with a constant lifting moment over the entire working arc, allow to 100% optimize the crane's capacity in positions close to the maximum vertical.

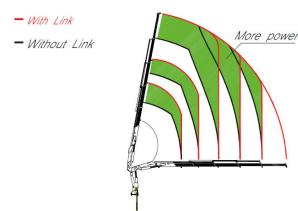


Power Jib Monitoring

The PJM system guarantees to operate with the maximum performance in every working condition thanks to a dynamic variation of the maximum pressure according to the crane arm angles.

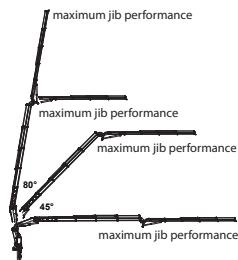


Rotation Endless System 1.0

A rotating bearing and one gearbox system, the electric wires are linked between base-column with a swivel electrical-hydraulic joint. Allows operator to gain maximum power also at the slowest operational speed and having the highest precision.




Crane Monitoring System 3.0

Crane stability control system TES2-TES3, with safety and overload controls medium high-range crane and HPVE lifting speed management. Active control on 4-8 working areas according to the model and vehicle stability requirements.




Winch Linear Control

The winch linear electronic control allows pulling the rope according to the working angle of the crane and the JIB. It optimizes the load control and makes every movement easier and safer.

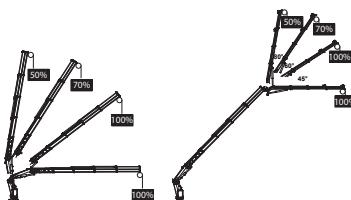


High Tensile Strength Steel

The entire high-strength steel structure thanks to an advanced FEM engineering process, develops an extraordinarily light and performing crane structure. In the perfect balance between maximum performance and operational safety.



High Power Velocity Electronic


A valve electronically manages the flow of oil to the distributor by increasing the load capacity of the crane and intervening on the lifting speed. Allowing the reduction of dynamic effects while optimizing performance.

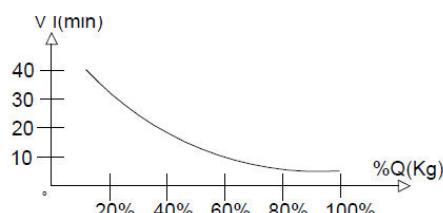


650 TOP RANGE

Load Charts


4 extensions

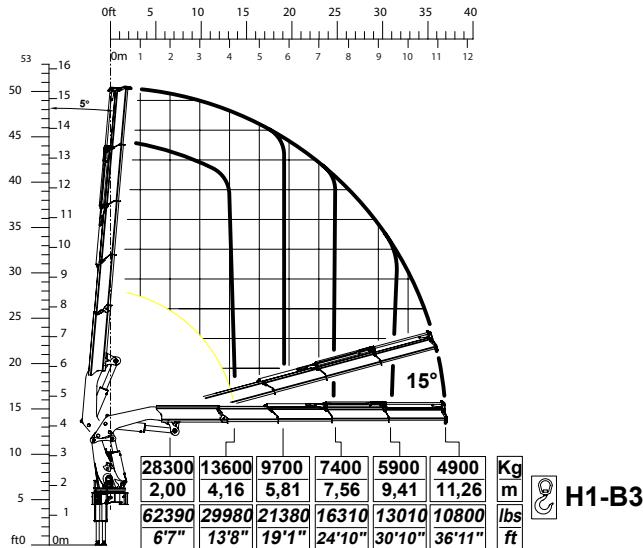


5 extensions

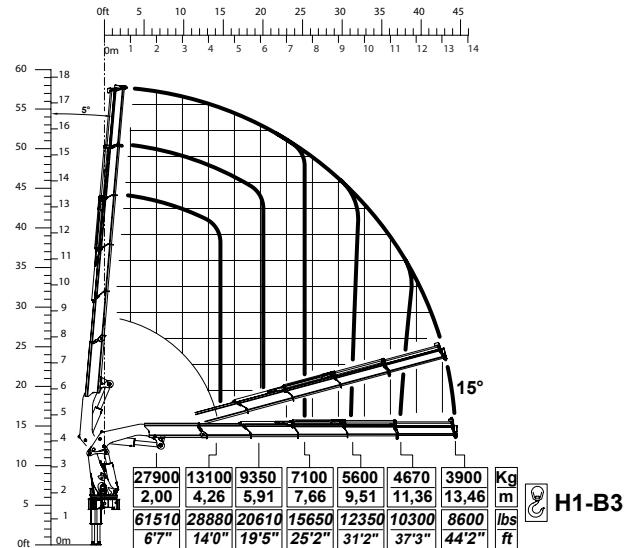


6 extensions

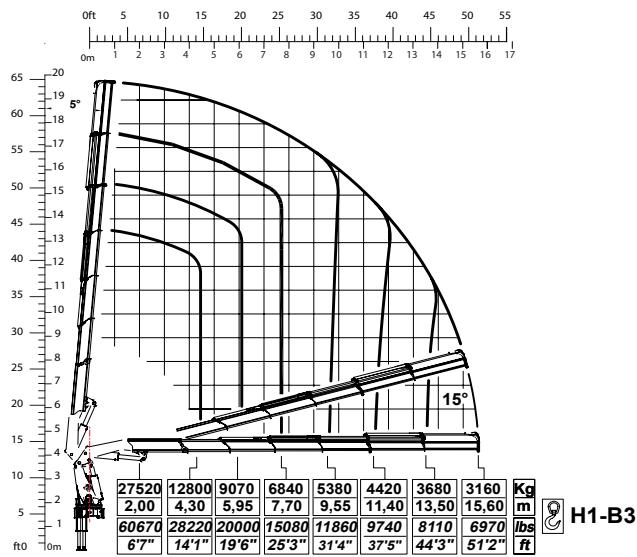


7 extensions

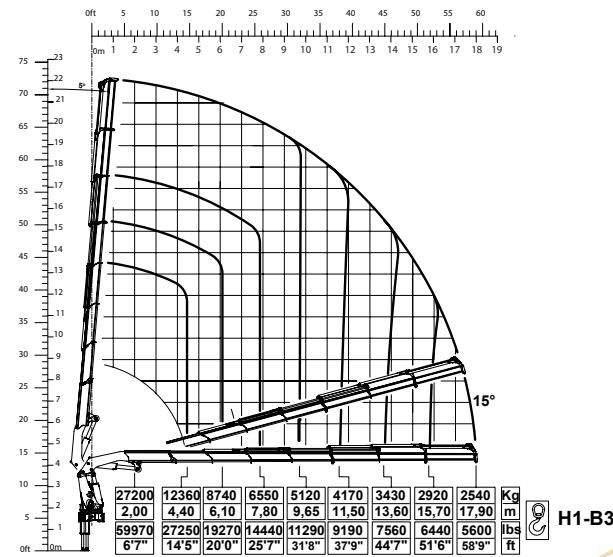


8 extensions

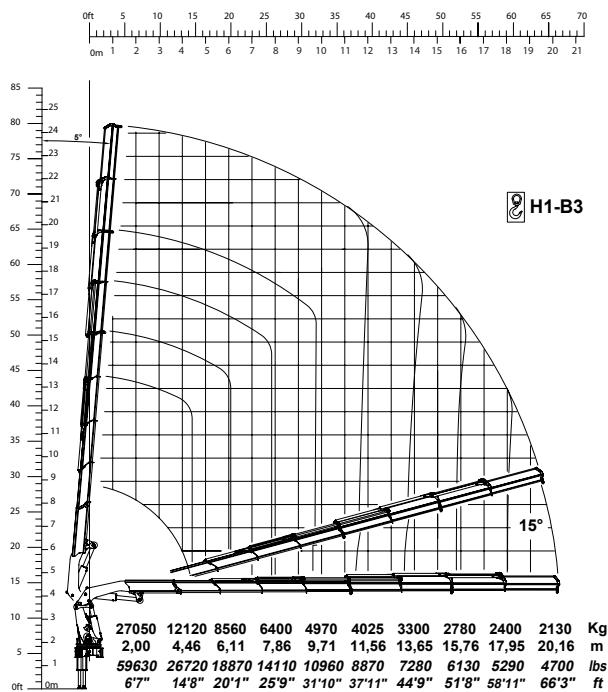


650.6 + J4

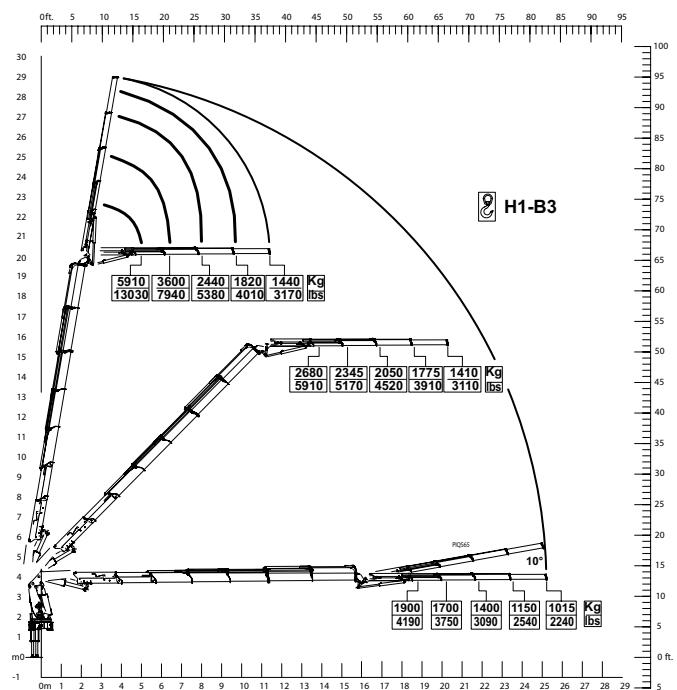


650.6 + J6

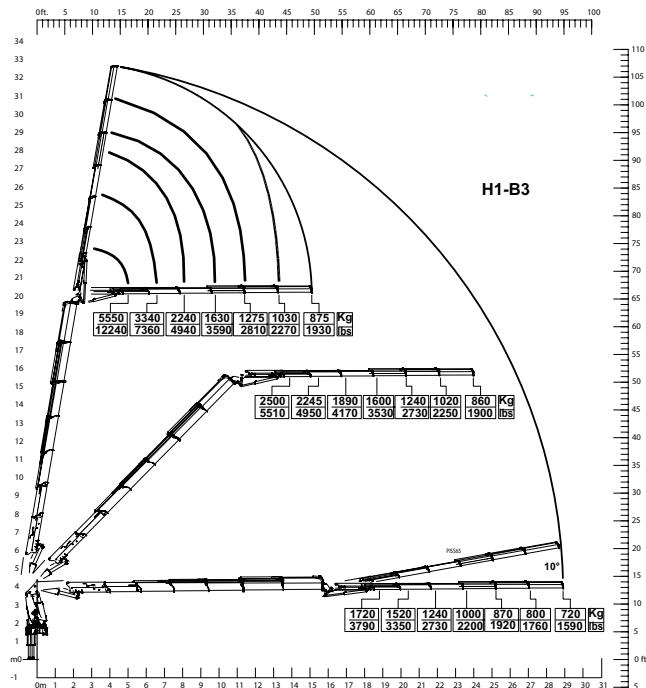

650.8 + J4

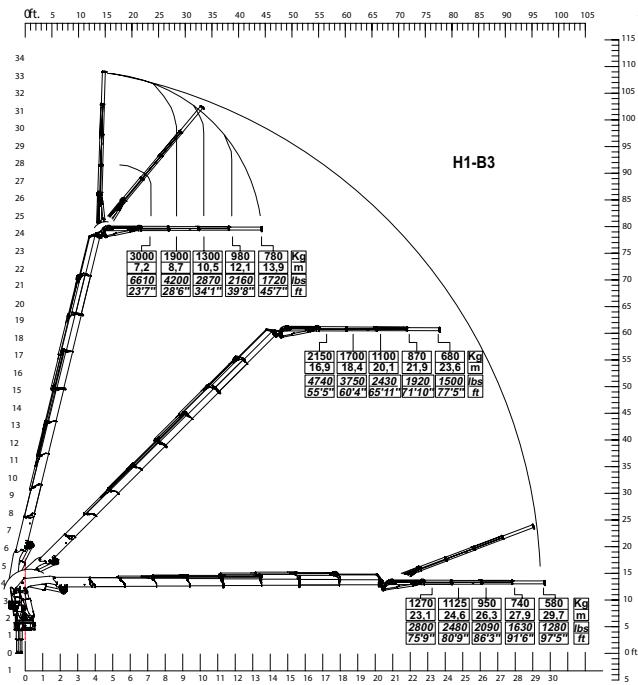


650.8 + J6

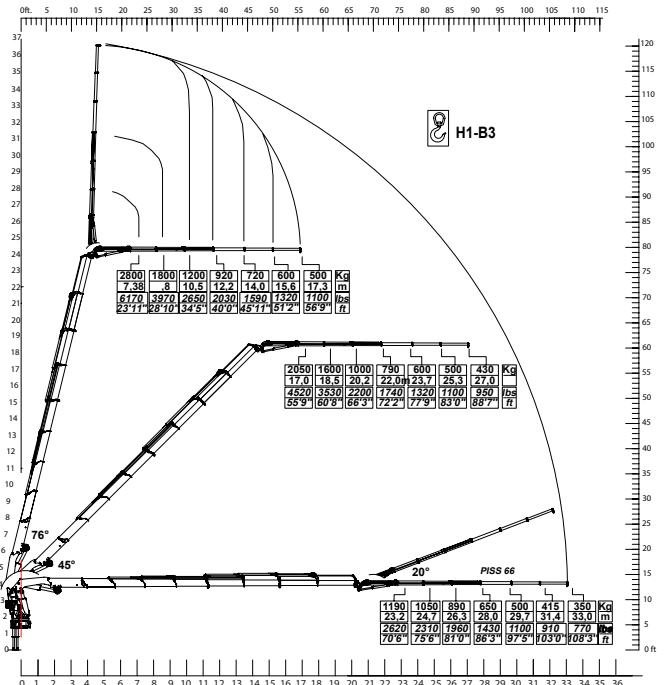



650 TOP RANGE

Crane Dimensions



back cabin left

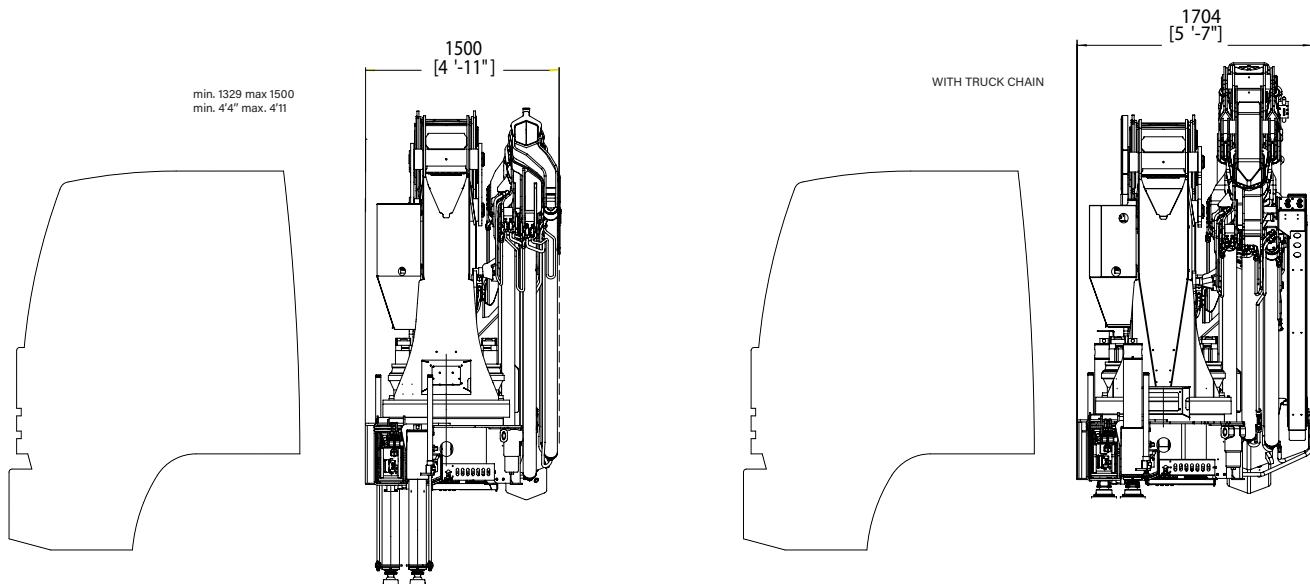


rear truck

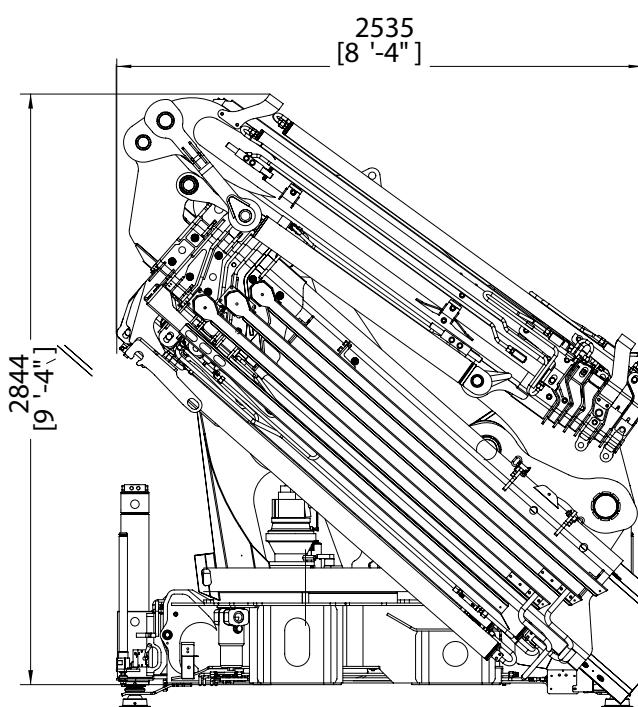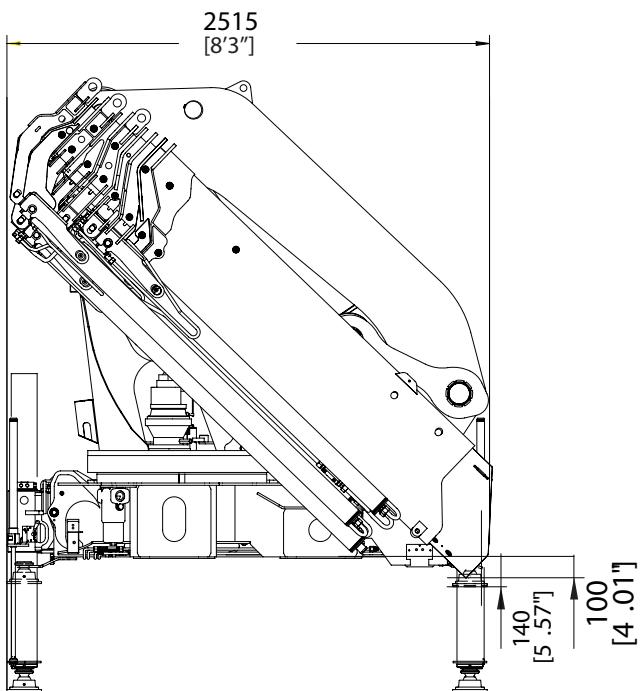

operational

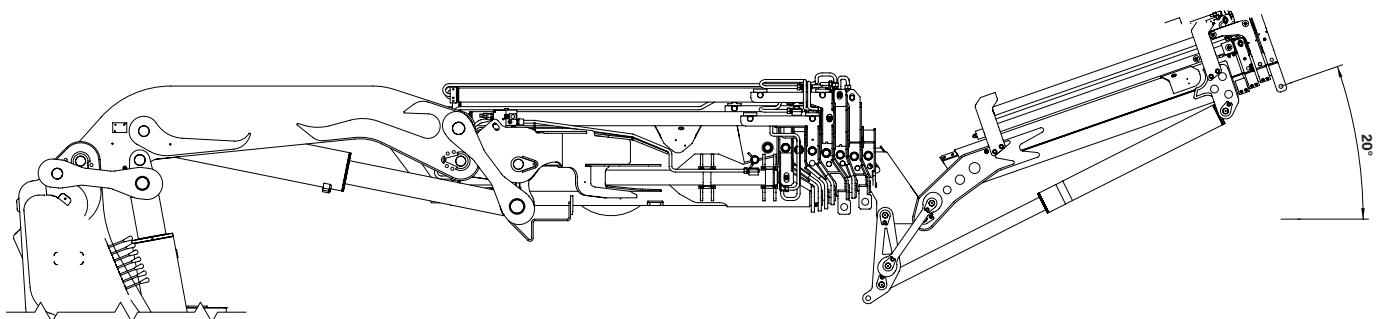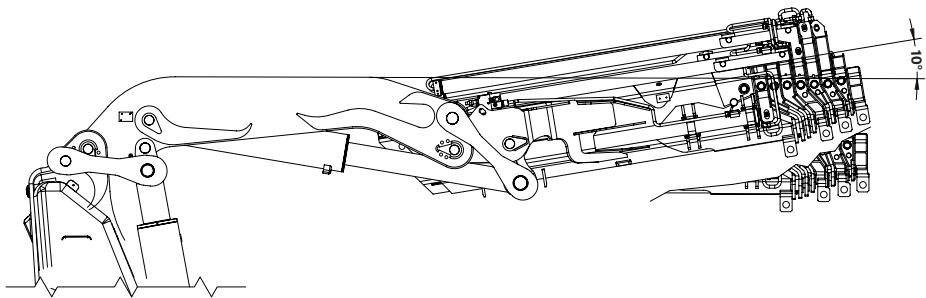

extended outriggers

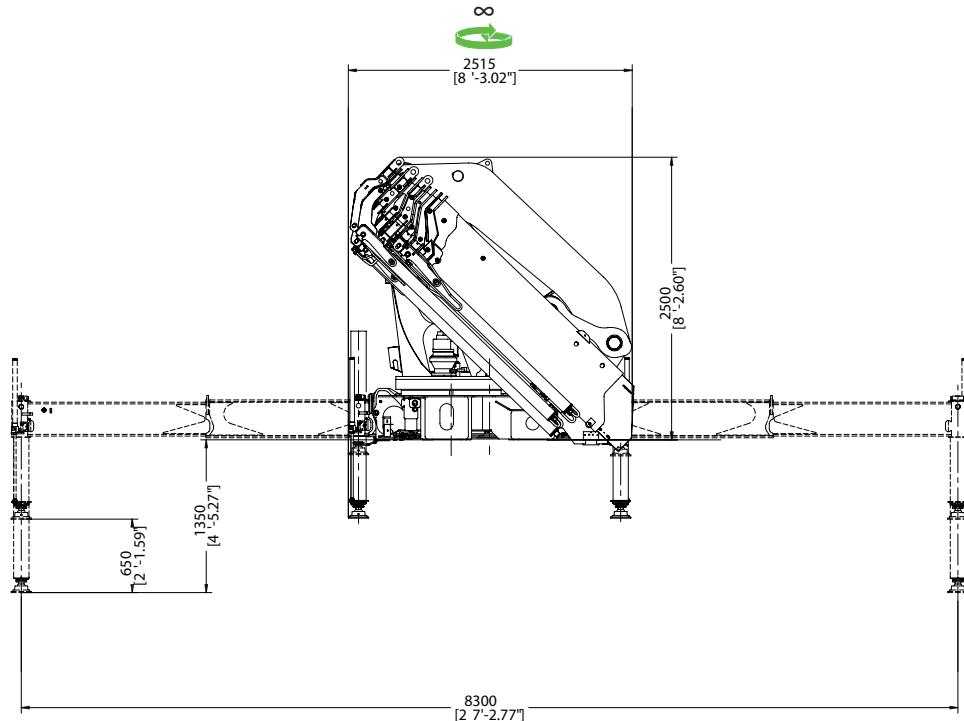

* Note: technical features are not binding, the company reserves itself the right to any modification without notice

650 TOP RANGE

Technical Data

summarized data

	kN.m	bar	l/min	kg	°	mm	mm	mm	mm
650.4	555	330	70	6060	∞	2515	1500	2470	8300
650.5	548	330	70	6290	∞	2515	1500	2470	8300
650.6	540	330	70	6530	∞	2515	1500	2470	8300
650.6J4	540	330	70	7630	∞	2515	1700	2844	8300
650.6j6	540	330	70	7790	∞	2515	1700	2844	8300
650.7	533	330	70	6700	∞	2515	1500	2500	8300
650.8	530	330	70	6900	∞	2515	1500	2500	8300
650.8j4	530	330	70	7675	∞	2525	1700	2844	8300
650.8j6	530	330	70	7760	∞	2525	1700	2844	8300

summarized data

	lbs.ft	psi	gal/min	lbs	°	ft/inc	ft/inc	ft/inc	ft/inc
650.4	401431	4785	18.4	13375	∞	8'3"	4'11'	8'11"	27'3"
650.5	396368	4785	18.4	13886	∞	8'3"	4'11'	8'11"	27'3"
650.6	390582	4785	18.4	14400	∞	8'3"	4'11	8'11"	27'3"
650.6J4	390582	4785	18.4	16820	∞	8'3"	5'7"	9'4"	27'3"
650.6j6	390582	4785	18.4	17170	∞	8'3"	5'7"	9'4"	27'3"
650.7	385518	4785	18.4	14770	∞	8'3"	4'11"	8'2"	27'3"
650.8	383349	4785	18.4	15211	∞	8'3"	4'11"	8'11"	27'3"
650.8j4	383349	4785	18.4	16921	∞	8'3"	5'7"	9'4"	27'3"
650.8j6	383349	4785	18.4	17110	∞	8'3"	5'7"	9'4"	27'3"

technical data

Max. lifting moment	555 kNm	401431 ft.lbs
Max. hydraulic outreach	20,16m	66'3"
Slewing angle	∞	∞
Slewing torque	6400 daNm	46291 ft.lbs
Stabilizer spread	8,3 mt	27'3"
Fitting space required (min./max)	1.33m/ 1.70m	4'4"/5'7"
Width folded	2,52 m	8'3"
Max. operating pressure	330 bar	4785 psi
Recommended pump capacity	70 l/min	18.4 US gal./min
Dead weight (vers. 4)	6060 kg	13375 lbs

* Note: technical features are not binding, the company reserves itself the right to any modification without notice





Delivering Promises



SUPERIOR
RELIABILITY
FOR EVERY
OPERATOR



COPMA 650



knuckle
boom
cranes



Powerful Synergies



CPS GROUP S.P.A.

281 Via Emilia , Castel Bolognese (RA) , 48014
Italy

T +39 0546 653 711

sales.cpsgroup@cps-group.com
service.cpsgroup@cps-group.com

cps-group.com

COPMA MODEL 650 TOP RANGE 6-2019 all rights reserved CPS GROUP



Technical features, design and specifications are not binding. CPS GROUP S.P.A. reserves itself the right to any modifications without prior notice.
COPMA, PESCI, PESCI MARINE and CPS are registered trademarks of CPS GROUP S.P.A. in Italy and other countries.